

CONVERSION OF 240V IGNITION SYSTEM TO 12V (ENIGMA)


PARTS REQUIRED

INSTRUCTIONS/WIRING DIAGRAM

12V GENERATOR

2 X NUTS AND BOLTS

1. Unclip the old generator from the side panel by pushing in the 2 clips.
2. Remove side panel, there is 1 screw behind the grill door and 2 on the back leg.
3. Pull wires off the 240v generator and remove generator and lead.
4. Using the new generator as a template drill 2 x 5mm holes
5. Use the 2 nuts and bolts supplied to fasten the generator to the side panel.

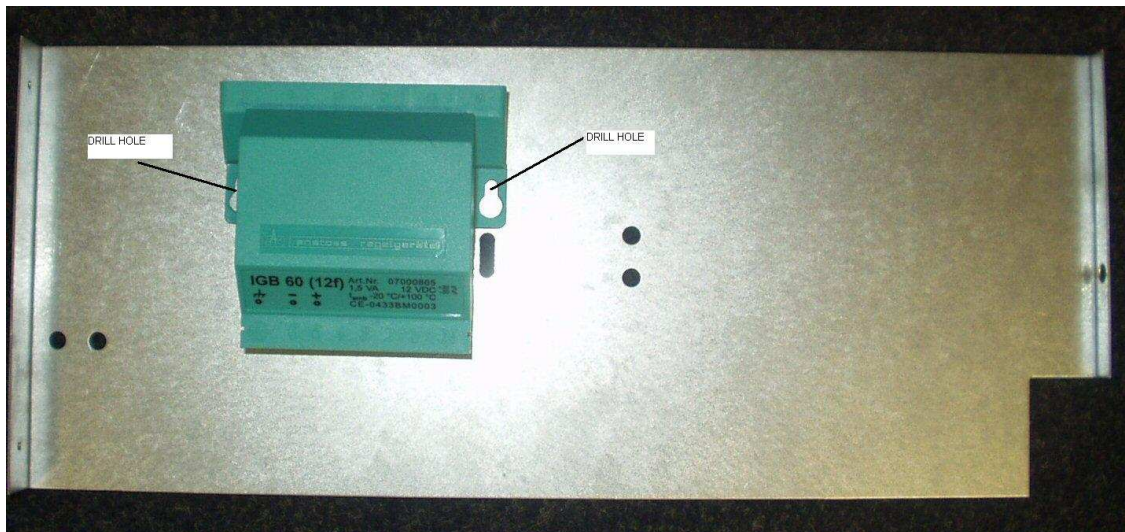

6. Reconnect the 6 H.T. leads to the top of the generator.
7. Connect 1 red wire to the + terminal on the generator.
8. The 12v power supply should then be connected to the remaining red wire and the – terminal on the generator. (see wiring diagram)
9. Remove 240v warning label fitted behind oven door.
10. Refasten side plate to cooker.

